
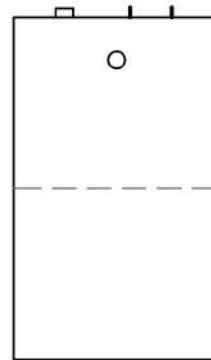


NOTES:

1. CONCRETE STRENGTH = MIN. 4500 PSI
2. STRUCTURAL FIBER REINFORCEMENT
3. "POLYLOK" PIPE SEALS CAST IN TANK INLET
4. MASTIC SEALANT IN TANK JOINT
5. 2 1/2" WALL THICKNESS
6. MANHOLE PLASTIC HANDLES
7. OUTLET "Y" RUBBER BOOT (POLYLOK-PIPE SEAL)

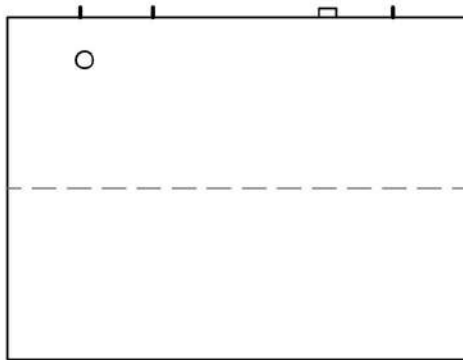

APPROX. WEIGHT:

TOP = 4,000 lbs
 BOTTOM = 4,000 lbs
 TOTAL = 8,000 lbs

GAL. PER IN = 21.4
 ACTUAL GAL. TO OUTLET = 1091
 FULL CAPACITY = 1262

LAKESIDE PRECAST

ABINGDON, VIRGINIA
 PH: 276-628-2472

1000 Gal. MS Tank 2 Comp

Date
 July 30, 2020

Scale
 Not To Scale

Sheet
 1