



SECTION A-A

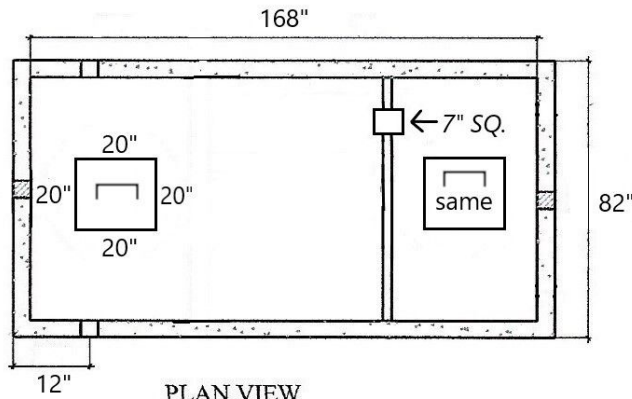


PLAN VIEW

**NOTES:**

1. CONCRETE STRENGTH = MIN. 4500 PSI
2. STRUCTURAL FIBER REINFORCEMENT
3. 4-5 INCH TAPERED WALLS
4. 5 INCH TOP AND BOTTOM
5. MASTIC SEALANT IN TANK JOINT
6. POLYLOK HANDLES IN LIDS
7. POLYLOK PIPE SEAL INLETS CAST-IN
8. 4" RUBBER BOOT OUTLET
9. MODIFICATIONS MADE UPON REQUEST

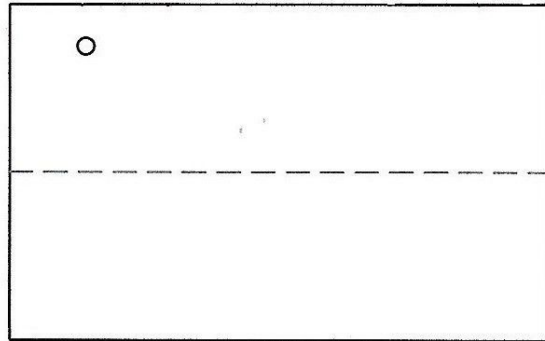

SIDE VIEW



FRONT VIEW

**APPROX. WEIGHT:**

TOP = 13,500 LB  
 BOTTOM = 13,600 LB  
 TOTAL = 27,100 LB

GAL. PER IN = 49.5  
 ACTUAL GAL. TO OUTLET = 3,372  
 FULL CAPACITY = 3,763

**LAKESIDE PRECAST**

ABINGDON, VIRGINIA  
 PH: 276-628-2472

**3000 Gal. MS Tank 2 Comp**

Date 07/12/2021  
 RPAW

Scale  
 Not To Scale

Sheet  
 1